



SIGNALBOOST™ DT Dual-Band 800/1900 MHz Desktop Signal Booster



For Small Office Area, Desk or Workspace Uses
Easy Set-up - Everything You Need is Included

PACKAGE CONTENTS




FEATURES

- Amplifies signals to and from cell tower
- Up to 10 times more power than your cell phone
- Wireless operation
- Works with Cellular and PCS frequencies
- Supports multiple phones/data cards
- 20'+ 30' RG-6 cable for custom installation
- Plug-and-play kit
- Attractive, sleek design
- Automatic oscillation/overload protection
- FCC and IC type accepted

SPECIFICATIONS

Part Number	801247
Frequency	824-894 MHz / 1850-1990 MHz
System Gain	55 dB
Max Output Power	2.5 watts
Max RF (downlink)	+9.5 dBm
Noise Figure	3.5 dB nominal
Flatness	±5 dB
Isolation	> 90 dB
Power Requirements	120-240V AC, 50-60 Hz, 8 W
Connectors	TNC Female / F-Female
Dimensions	6.2 x 4.2 x 1.5 (inch) 15.7 x 10.7 x 3.8 (cm)
Weight	0.64 lbs / 0.29 kg

INSTALLATION

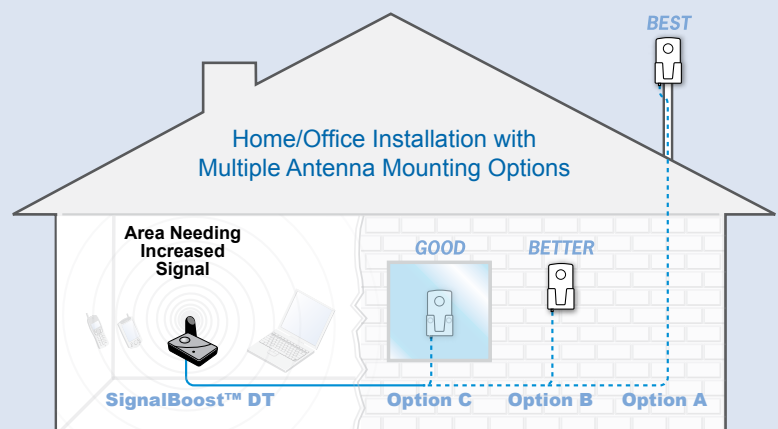

Wireless operation - no physical connection to cell phone or cellular data card