

# SAY GOODBYE TO DROPPED CALLS WITH WILSON ELECTRONICS **SIGNALBOOST™ DT** DESKTOP BOOSTER

Improve cell phone and data card performance  
in your home or office – anywhere you need a  
stronger signal indoors!

- Greatly reduces dropped calls
- Supports multiple phones and cellular-based data cards simultaneously
- Works with all cell phones and carriers (except Nextel/iDEN)
- Do it yourself installation
- Extends cell phone battery life
- Made in the USA

**MORE POWERFUL  
THAN YOUR  
CELL PHONE ALONE**

Amplifies Voice  
and Data coverage  
for all Cell Phones  
and Carriers  
(except Nextel/iDEN)

 **Wilson**<sup>®</sup>  
Electronics, Inc.

Improving Your Cellular Signal

866-294-6996 • sales@wilsonelectronics.com  
[www.wilsonelectronics.com](http://www.wilsonelectronics.com)

**SIGNALBOOST™**  
**DT**  
**DESKTOP**

# SIGNALBOOST™ DT

## Dual Band 800/1900 MHz Desktop Signal Booster



801247




### FEATURES

- Amplifies signals to and from cell site
- Up to 2000 mw output power to the cell site
- Wireless operation
- Works with Cellular and PCS carriers in USA, Canada and Latin America
- Supports multiple phones/data cards
- Attractive design
- Automatic oscillation/overload protection
- FCC and IC type accepted

Part Number	801247
Frequency	824-894 MHz / 1850-1990 MHz
Gain	55 dB
Max Output Power	2.5 watts
Max RF (downlink)	+9.5 dBm
Noise Figure	3.5 dB nominal
Flatness	±5 dB
Isolation	> 90 dB
Power Requirements	110-240 V AC, 50-60 Hz, 8 W
Connectors	TNC Female / F-Female
Dimensions	6.2 x 4.2 x 1.5 (inch) 15.7 x 10.7 x 3.8 (cm)
Weight	0.64 lbs / 0.29 kg

### INCLUDES

- Outdoor / window directional 5 dB cradle antenna
- Omni-directional inside antenna
- 50' of RG6 cable (in 20' and 30' lengths)
- All mounting hardware
- AC power supply
- Installation guide

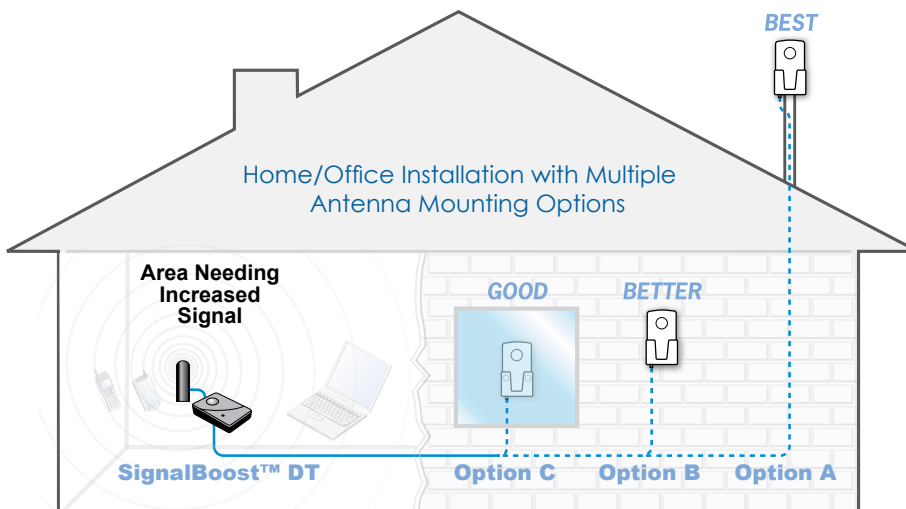

### Outside Antenna Mounting Options

- GOOD Indoor window mount option
- BETTER Outdoor wall mount option
- BEST Outdoor pole mount option

