

SIGNALBOOST™ **HDSOLO™** Dual-Band Cellular Boosters



FEATURES

**Inductively couples to phone and all cards with Ultra-Slim antenna - no adapter required. Operates similar to direct connection signal boosters.**

- Works with all Cellular/PCS cell phones and laptop data cards (except iDEN)
- Connects to ALL phones and data cards with a Universal Ultra-Slim Antenna using a Velcro® patch
- No plug-in phone adapter needed
- Up to 10 times more power than your cell phone or laptop data card
- Significantly improves voice and data signal quality
- Increases data communication rates needed for 3G technologies
- Receives and transmits better than your cell phone
- Extends cell phone battery life
- Works great in mobile, building and marine applications
- Easy to install and use
- Works on all generations of CDMA, TDMA and GSM
- Up to 3 watts maximum power
- FCC and IC type accepted

= Best Seller


**KIT** = Available in Plug-and-Play kit (Page 26)

SPECIFICATIONS


Part Number	811210	KIT	811710	KIT	811910	KIT
Frequency	824-894 MHz 1850-1990 MHz		890-960 MHz 1710-1880 MHz		890-960 MHz 1885-2200 MHz	
Gain	25 dB / 25 dB					
Max Output Power (uplink)	2700 mW					
Max RF (downlink)	+10 dBm					
Noise Figure	3.5 dB nominal					
Flatness	±2 dB / ±2 dB					
Isolation	> 50 dB					
Power Requirements	12 V DC / 2 A max					
Connectors	FME-Male 50 ohms					
Dimensions	5 x 3.5 x 1.2 (inch) / 12.7 x 8.9 x 3 (cm)					
Weight	1.03 lbs / 0.468 kg					



HOME/OFFICE INSTALLATION DIAGRAM (OPTIONAL SET-UP SHOWN BELOW)

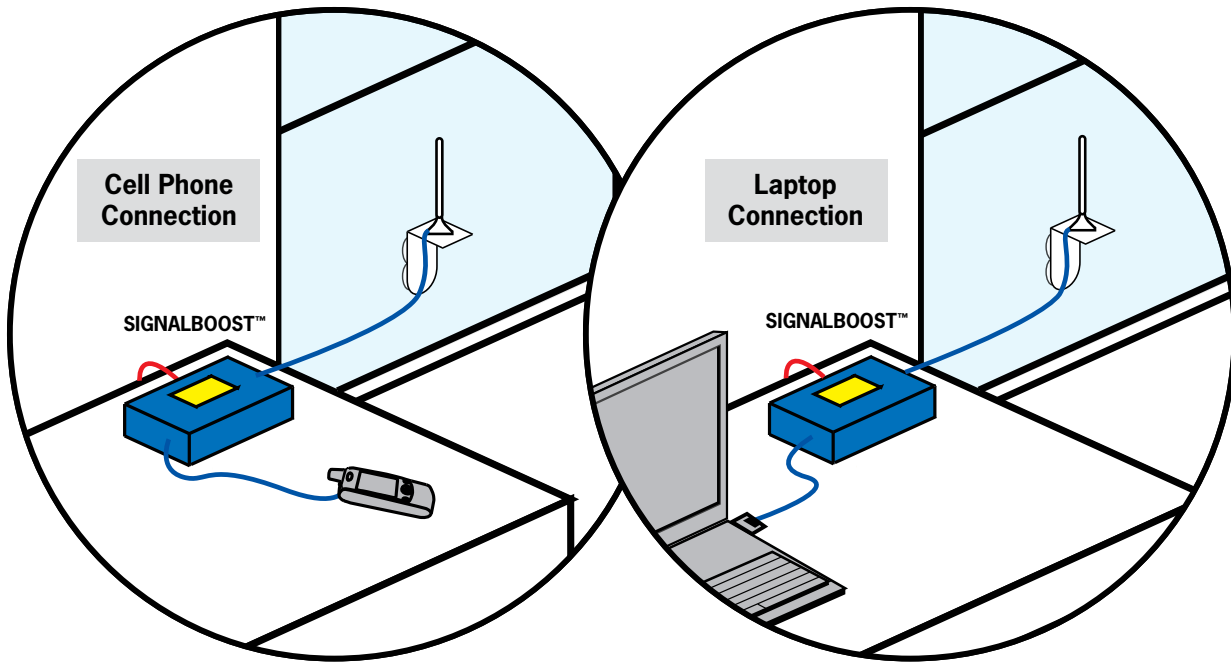

MOBILE INSTALLATION DIAGRAM

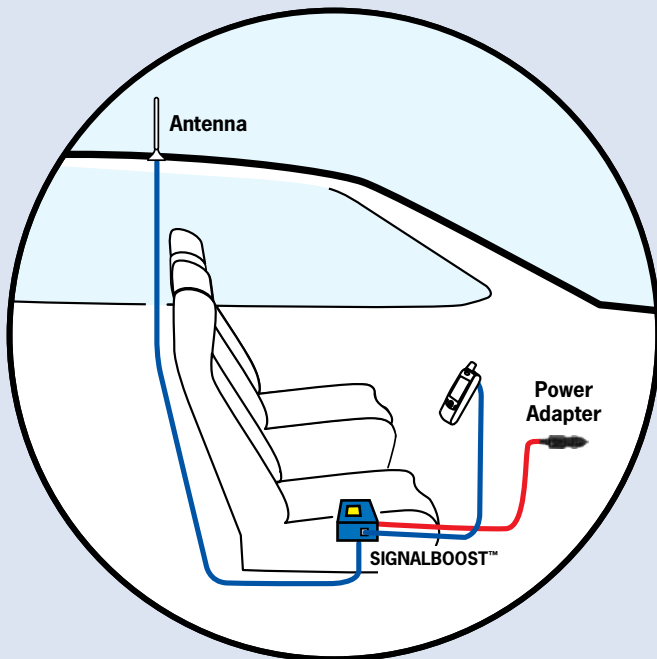

Attach the Velcro® Universal Ultra-Slim Antenna to the back of your cell phone, data card or MiFi device